

## **SPECIFICATION SHEET**

Type:

Model:

Project:

# MODEL 4206-LED Landscape Series • Path & Spread Lights

## **FIXTURE SPECIFICATIONS:**

### **HOUSING:**

Die-cast, copper-free aluminum.

#### STEM:

 $\frac{1}{2}$ " schedule-40 aluminum pipe with  $\frac{1}{2}$ " NPT custom bushing designed with a stress-dispersing collar, to provide strength & stability for mounting.

### FINISH:

Polyester powder-coat finish available in Black, Verde, Architectural Brick, Architectural Bronze, Light Bronze, Dark Bronze, Granite, Pewter, Terracotta, Rust, Hunter Green, Mocha, Weathered Bronze, Weathered Iron, and White.

#### LENS:

Clear, high-impact, polycarbonate lens.

### LAMP TYPE:

High Output LED with Vista exclusive smart-driver, powered to operate for 50,000 hours.

#### **ELECTRICAL:**

Input voltage range 6–15V AC, regulated to achieve uniform illumination throughout the cable run of fixtures. Integral surge & reverse polarity protection.

## MOUNTING:

Bottom of stem threaded with  $\frac{1}{2}$ " NPT. Fixture may be mounted into threaded hubs in junction boxes, ground stakes, or floor-mounting canopies. Please see fixture ordering information for mounting selection.

### **FASTENERS/INSERTS:**


All fasteners are stainless steel with brass inserts.


#### WIRING:

Prewired with a three-foot pigtail of 18-2 direct-burial cable & underground connectors for a secure connection to supply cable.

All Vista luminaires are MADE IN U.S.A.

## **DIMENSIONS:**

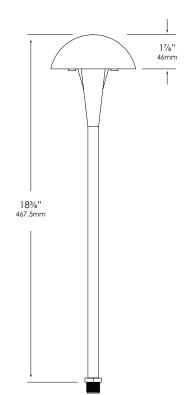



Vista Professional Outdoor Lighting reserves the right to modify the design and/or construction of the fixture shown without further notification.



# **SPECIFICATION SHEET**

# MODEL 4206-LED Landscape Series • Path & Spread Lights

## FIXTURE ORDERING INFORMATION

TO ORDER FIXTURE: Select appropriate choice from each column as in the following example.

### EXAMPLE: PR-4206-B-W-LB2ND

MOUNTING	MODEL	FINISH	COLOR TEMP	LAMP
PR - ABS ground stake	4206	B - Black	W - Warm	LB2ND - 2.5 watt
		G - Verde	N - Neutral	LB5ND - 5 watt
		BR - Architectural Brick	C - Cool	
		Z - Architectural Bronze		LED - Group B
		LZ - Light Bronze		Emitter Qty - 1
		DZ - Dark Bronze		Temperature - Warm (W), Neutral (N), Cool (C)
		GT - Granite		Operating voltage range - 6 to 15V.
		P - Pewter		,
		TC - Terracotta		(Please see lamp order code column on lamp
		R - Rust		guide, Vista product catalog.)
		HG - Hunter Green		
		M - Mocha		
		WB - Weathered Bronze		
		WI - Weathered Iron		
		W - White		

Fixtures shipped with standard lamp, unless otherwise specified.

Fixtures shipped with specified mounting hardware.

Note: Optional custom length stems available. Consult local distributor.